




CAGE RODS LOCKING SET SCREW
2.0mm [0.08in] HEX
4 PLACE

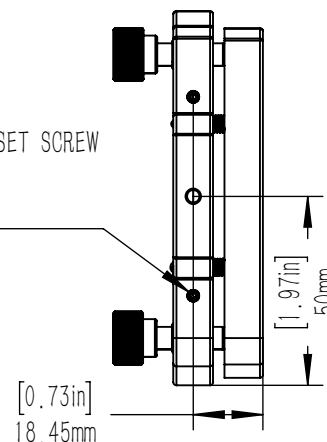


SM2 (2.035-40) SERIES INTERNAL THREAD THRU
INCLUDES 2 SM2 RETAINING RINGS
MOUNTING SEAT THICKNESS: 10.2mm [0.40in]
Clear Aperture (CA): $\phi 48.3\text{mm}$ [1.90in]
Maximum Optic Thickness: 5.2mm [0.20in]

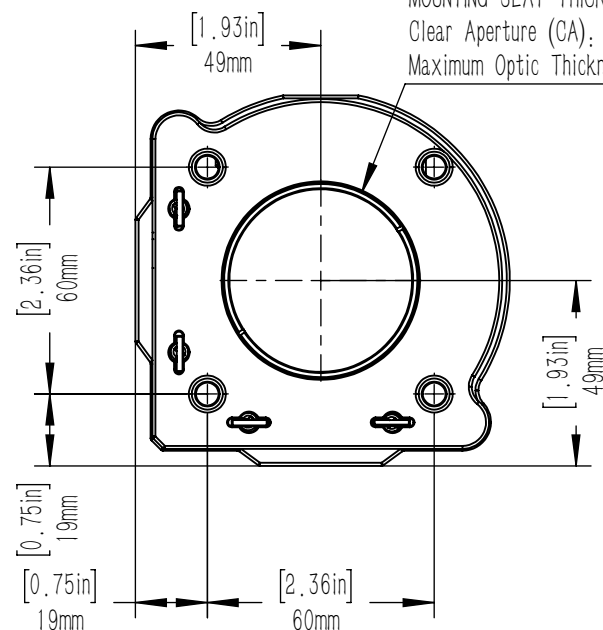


M4 X 0.7 MOUNTING HOLE
3 PLACES

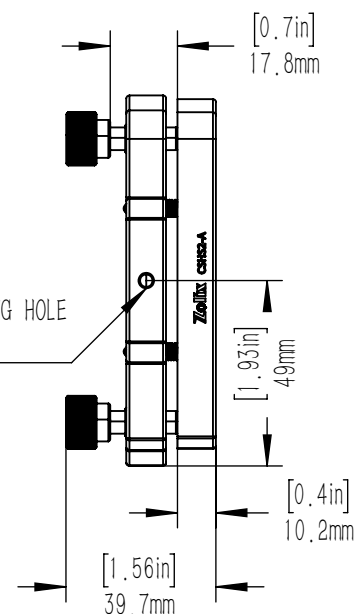

M6X0.25 ADJUSTER SCREWS
PROVIDES $\pm 3^\circ$ TOTAL ANGULAR DISPLACEMENT
(0.2° PER REVOLUTION)
AND $\pm 3\text{mm}$ TOTAL TRANSLATION DISPLACEMENT
3 PLACE

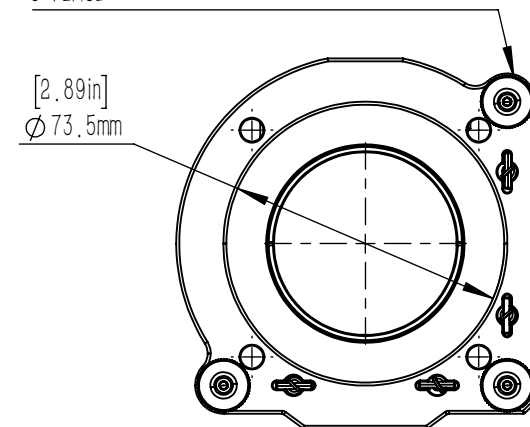

DRAWING
PROJECTION



CSHS2-A

Zolix

	NAME	DATE
DRAWN	NIC	4th/August/2025
APPROVAL	DICK	4th/August/2025

THE DRAWINGS ARE ONLY FOR
TYPE SELECTION INFORMATION

60mm Cage-Style
Adjustment Mount

MATERIAL	WEIGHT	SCALE	REV
FOLLOW THE PARTS	0.274	1:2	V1

shop.zolix.com.cn