


SM1 (1.035-40) SERIES INTERNAL THREAD
 5.0mm [0.20in] DEEP
 2 PLACES TOTAL, 1 PER SIDE
 $\phi 22.4\text{mm}$ [0.88in] CLEAR APERTURE


$\phi 6.0\text{mm}$ [0.24in] CAGE ROD BORE
 5.5mm [0.22in] DEEP
 FOR USE WITH MOP SERIES RODS
 (NOT INCLUDED)
 8 PLACES TOTAL, 4 PER SIDE

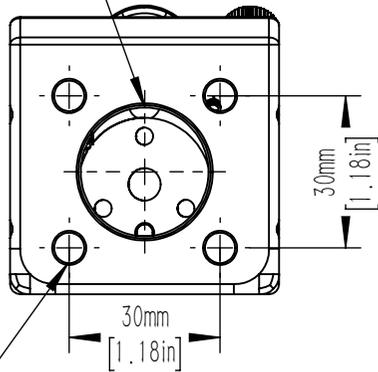

M6X1.0 TAPPED HOLE 5.5mm DEEP
 3 PLACES (2 PLACE, BOTH SIDES)


OFF-AXIS PARABOLIC MIRROR MOUNTING SEAT,
 WHICH CAN BE QUICKLY REMOVED

ARROW ENGRAVING INDICATES
 COLLIMATED BEAM AXIS

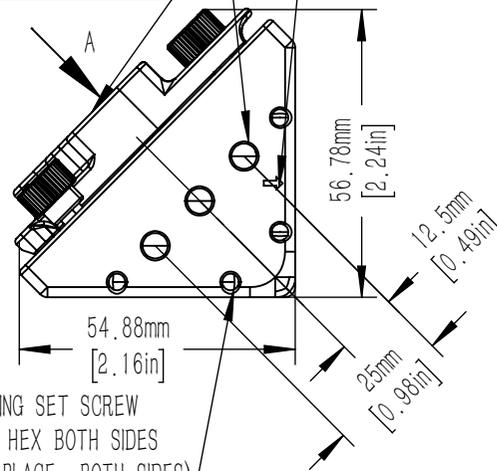

M4x0.7 LOCKING SET SCREW
 2mm [0.08in] HEX BOTH SIDES
 8 PLACES (24 PLACE, BOTH SIDES)

MOUNTING HOLES FOR
 M3 CAP SCREW
 3 PLACES

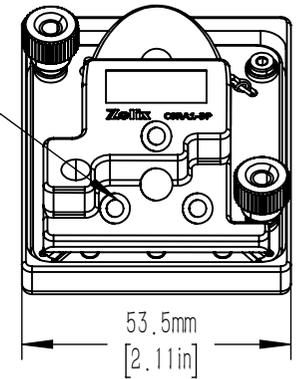


视图 A
 $\curvearrowright 45^\circ$


M5X0.25 ADJUSTER SCREW FOR MIRROR
 SURFACE TRANSLATION
 2.0mm [5/64in] HEX

LASER ENGRAVED BOX FOR LABELING OF MOUNTED OPTIC

M5X0.25 ADJUSTER SCREWS
 PROVIDES $\pm 3.4^\circ$ TOTAL ANGULAR
 DISPLACEMENT
 2 PLACES 2.0mm [5/64in] HEX

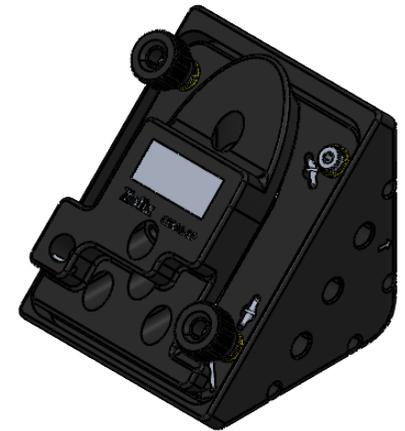

LOCKING SCREW FOR SECURING OPTIC PLATE
 TO CORNER CUBE
 2.0mm [5/64in] HEX

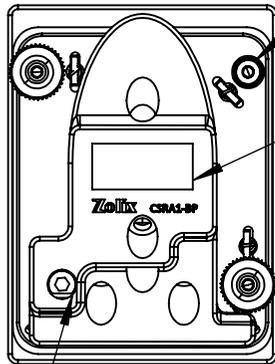

| | | | | | | | | | | | |
|---|--|------|-----------------|------------------|--------|-------|-----|-------------------|--|--|--|
| DRAWING PROJECTION | | | | CSRA1-BP | | | | | | | |
| DRAWN | | NAME | DATE | | | | | | | | |
| APPROVAL | | DICK | 21/October/2025 | MATERIAL | WEIGHT | SCALE | REV | shop.zolix.com.cn | | | |
| THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION | | | | FOLLOW THE PARTS | 0.185 | 2:3 | V1 | | | | |