

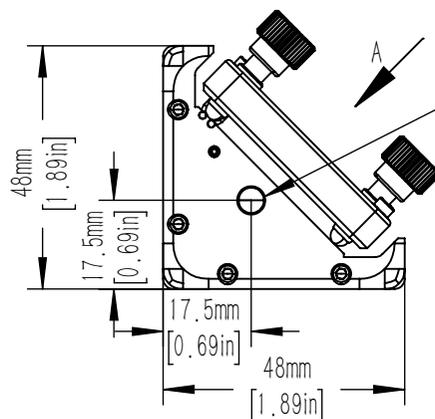
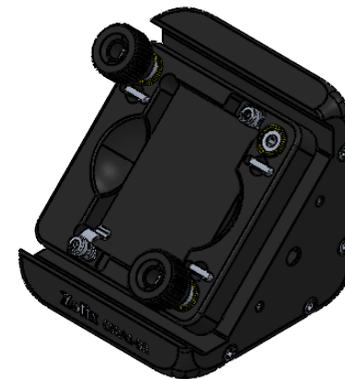
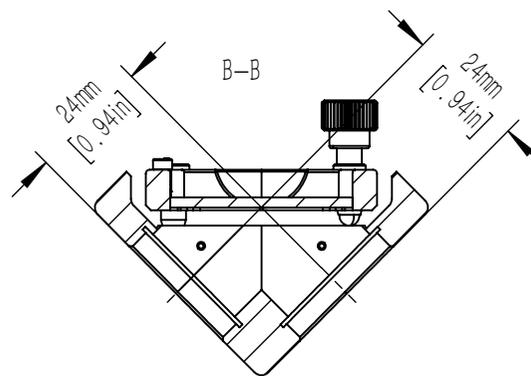


SM1 (1.035-40) SERIES INTERNAL THREAD  
 5.0mm [0.20in] DEEP  
 2 PLACES TOTAL, 1 PER SIDE  
 $\varnothing 22.4\text{mm}$  [0.88in] CLEAR APERTURE

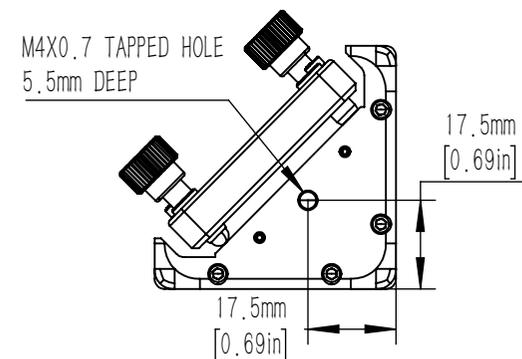


M6X1 TAPPED HOLE  
 5.5mm DEEP

M3 TAPPED HOLE  
 5.5mm DEEP  
 FOR USE WITH 6mm CAGE SERIES RODS  
 (NOT INCLUDED)  
 8 PLACES TOTAL, 4 PER SID

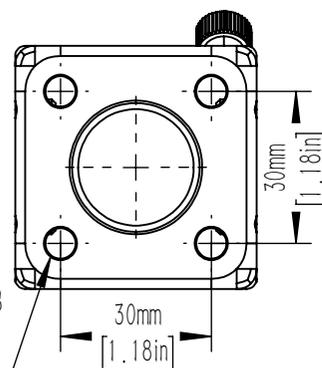

M5X0.25 ADJUSTER SCREW FOR MIRROR SURFACE TRANSLATION  
 2.0mm [5/64in] HEX

视图 A  
 45°

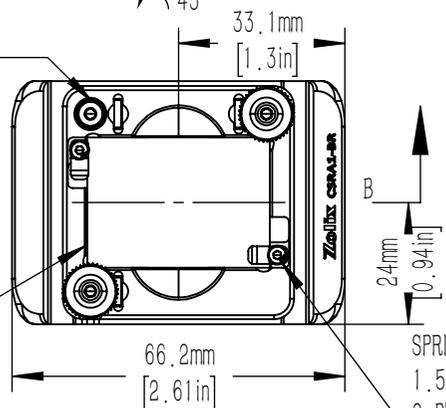

ACCEPTS 25mm x 36mm OPTICS  
 MAXIMUM OPTICS THICKNESS 3mm  
 4 mm [0.16in] DEEP

SPRING CLAMPS TO HOLD OPTIC  
 1.5 mm [0.06 in] HEX  
 2 PLACES

DRAWING PROJECTION				CSRA1-BR									
NAME		DATE										45-DEGREE MOUNTING AND ADJUSTMENT BRACKET	
DRAWN		NIC		3rd/Dec/2025		MATERIAL		WEIGHT		SCALE		REV	
APPROVAL		DICK		3rd/Dec/2025		FOLLOW THE PARTS		0.121		2.3		V1	
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION						shop.zolix.com.cn							