




A-A

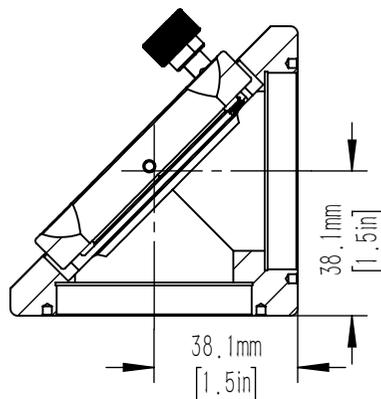

M6X0.25 ADJUSTER SCREWS PROVIDES +/-4° TOTAL ANGULAR DISPLACEMENT
2 PLACES 2.0mm [5/64in] HEX

M6X0.25 ADJUSTER SCREW FOR MIRROR SURFACE TRANSLATION
2.0mm [5/64in] HEX

M4X0.7 TAPPED HOLE
5.5mm DEEP
6 PLACES (3 PLACE, BOTH SIDES)
NYLON-TIPPED SET SCREW FOR SECURING OF MOUNTED OPTIC
2.0mm [5/64in] HEX

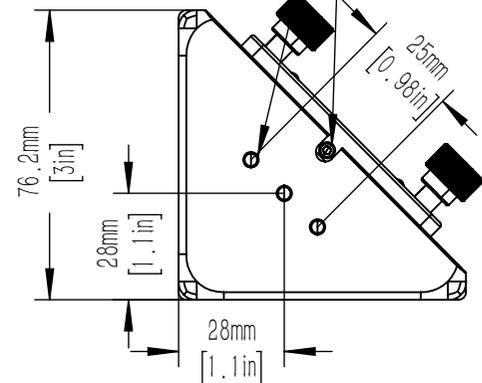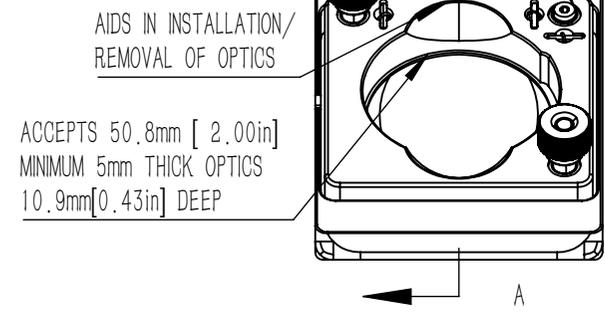

| | | | | | | | | | | |
|--|------|-----------------|---|--|--|--|-------------------|--------|-------|-----|
| DRAWING PROJECTION | | | CSRA2-A | | | | Zolix | | | |
| NAME | DATE | | | | | | | | | |
| DRAWN | NIC | 21/October/2025 | 45-DEGREE INSTALLATION ADJUSTMENT BRACKET | | | | MATERIAL | WEIGHT | SCALE | REV |
| APPROVAL | DICK | 21/October/2025 | | | | | FOLLOW THE PARTS | 0.423 | 1:2 | V1 |
| THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION | | | | | | | shop.zolix.com.cn | | | |