

ϕ 6.0mm [0.24in] CAGE ROD BORE
 5.8mm [0.23in] DEEP
 FOR USE WITH MOP SERIES RODS
 (NOT INCLUDED)
 8 PLACES TOTAL, 4 PER SIDE

SM2 (ϕ 2.035"-40) SERIES INTERNAL THREAD
 8.8mm [0.35in] DEEP
 2 PLACES TOTAL, 1 PER SIDE
 ϕ 42.0mm [1.65in] CLEAR APERTURE




M6X0.25 ADJUSTER SCREWS
 PROVIDES +/-4° TOTAL
 ANGULAR DISPLACEMENT
 2 PLACES 2.0mm [5/64in] HEX

M6X0.25 ADJUSTER SCREW FOR MIRROR
 SURFACE TRANSLATION
 2.0mm [5/64in] HEX

M4X0.7 TAPPED HOLE
 5.5mm DEEP
 6 PLACES (3 PLACE, BOTH SIDES)



NYLON-TIPPED SET SCREW FOR SECURING
 OF MOUNTED OPTIC
 2.0mm [5/64in] HEX

A-A

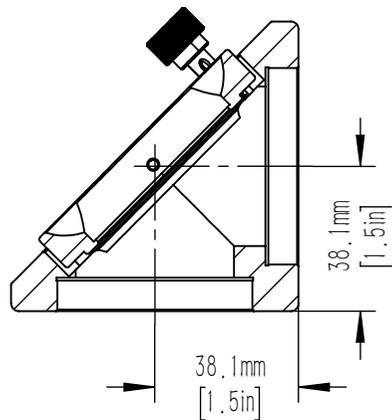

AIDS IN INSTALLATION/
REMOVAL OF OPTICS

ACCEPTS 50.8mm [2.00in]
 MINIMUM 5mm THICK OPTICS
 10.9mm [0.43in] DEEP

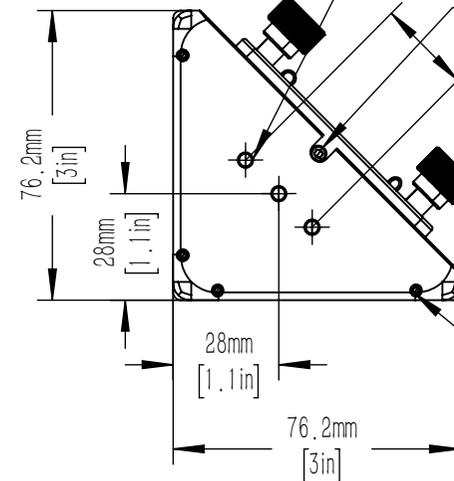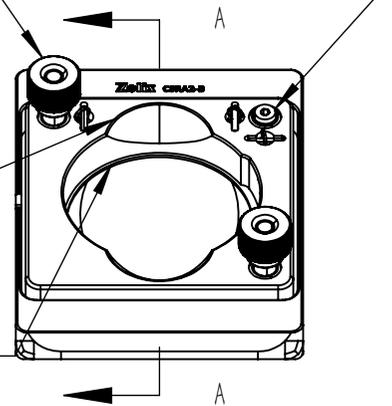

M3X0.5 LOCKING SET SCREW
 2mm [0.08in] HEX BOTH SIDES
 8 PLACES (4 PLACE, BOTH SIDES)

DRAWING PROJECTION

CSRA2-B

Zolix

	NAME	DATE
DRAWN	NIC	21/October/2025
APPROVAL	DICK	21/October/2025

45-DEGREE INSTALLATION
ADJUSTMENT BRACKET

MATERIAL	WEIGHT	SCALE	REV
FOLLOW THE PARTS	0.421	1:2	V1

shop.zolix.com.cn

THE DRAWINGS ARE ONLY FOR
TYPE SELECTION INFORMATION