

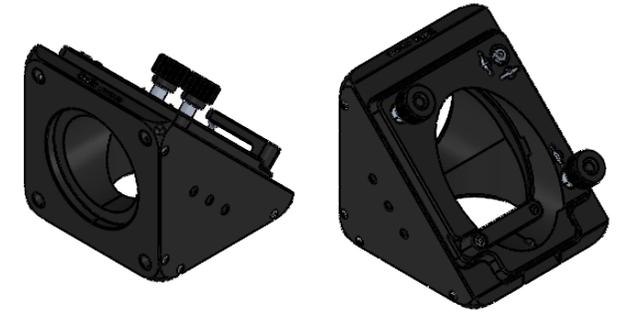


SM2 (2.035-40) SERIES INTERNAL THREAD
 8.8mm [0.35in] DEEP
 2 PLACES TOTAL, 1 PER SIDE
 42.0mm [1.65in] CLEAR APERTURE

$\phi 42.0\text{mm}$ [1.65in]
 CLEAR APERTURE NOMINA

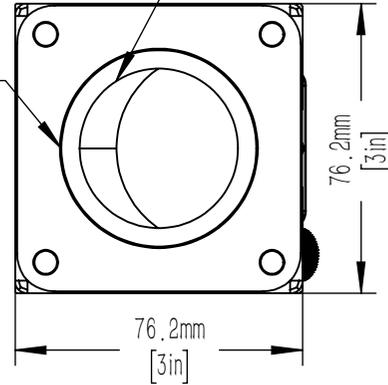


NYLON-TIPPED SET SCREW
 FOR SECURING OF MOUNTED OPTIC
 2.0mm [5/64in] HEX

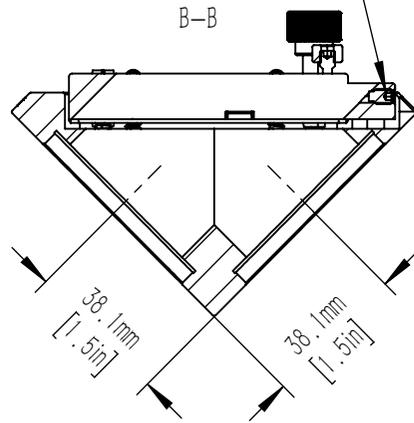


$\phi 6.0\text{mm}$ [0.24in] CAGE ROD BORE
 5.8mm [0.23in] DEEP
 FOR USE WITH $\phi 6.0\text{mm}$ SERIES RODS
 (NOT INCLUDED)
 8 PLACES TOTAL, 4 PER SID

M4X0.7 TAPPED HOLE
 5.5mm DEEP 3 PLACES

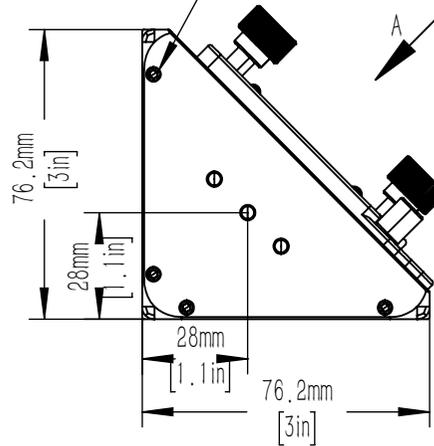


M6X1.0 TAPPED HOLE
 8.0mm DEEP
 3 PLACES

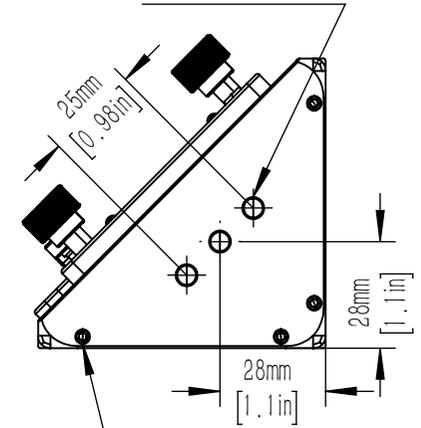

M6X0.25 ADJUSTER SCREW
 FOR MIRROR SURFACE TRANSLATION
 2.0mm [5/64in] HEX

视图 A
 45°

M6X0.25 ADJUSTER SCREWS
 PROVIDES $\pm 3^\circ$ TOTAL ANGULAR DISPLACEMENT
 2 PLACES 2.0mm [5/64in] HEX

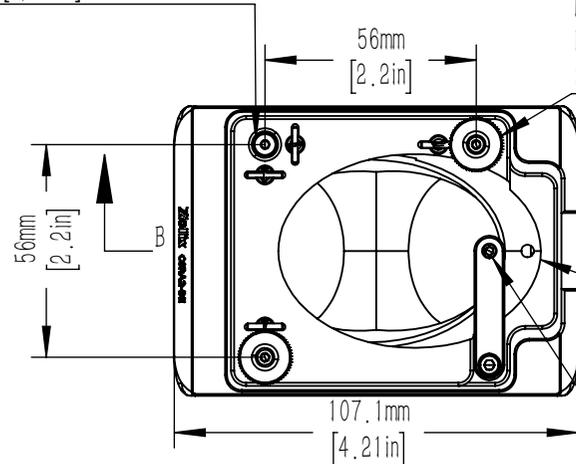

ACCEPTS 2.00in ELLIPTICAL OPTICS
 (OPTIC NOT INCLUDED)

NYLON-TIPPED SET SCREW
 FOR SECURING OF MOUNTED OPTIC
 2.0mm [5/64in] HEX

CAGE ROD LOCKING SET SCREW
 2.0mm HEX
 8 PLACES TOTAL, 4 PER SIDE

DRAWING PROJECTION			CSRA2-BE Zolix			
NAME	DATE					
DRAWN	NIC	6th/Nov/2025	45-DEGREE INSTALLATION ADJUSTMENT BRACKET			
APPROVAL	DICK	6th/Nov/2025				
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION			MATERIAL	WEIGHT	SCALE	REV
			FOLLOW THE PARTS	0.433	1:2	V1
			shop.zolix.com.cn			