

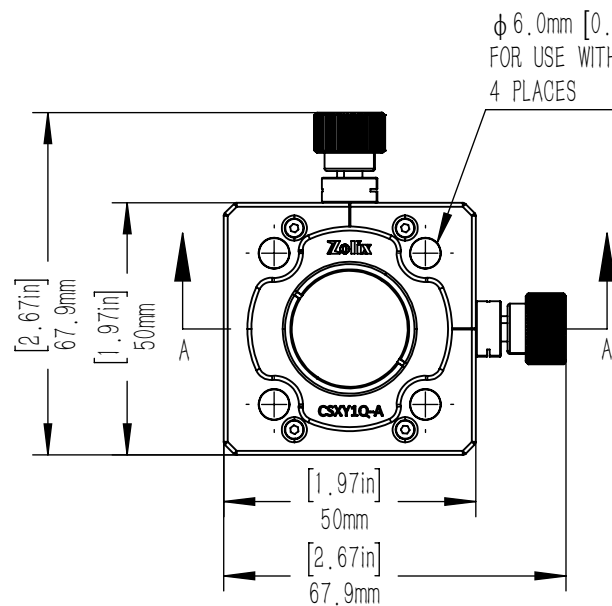
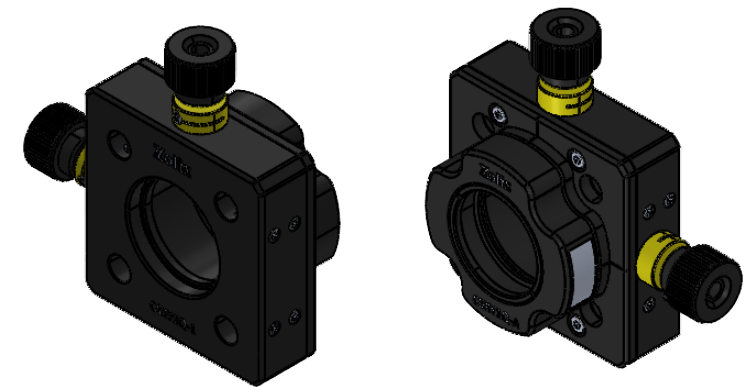



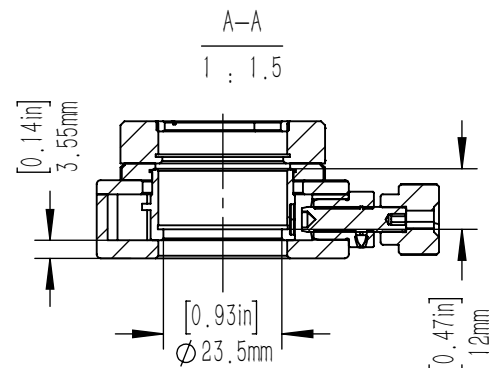


LOCKING FOR 6mm (0.24in) RODS
2.0mm(0.08in) HEX
8 PLACES

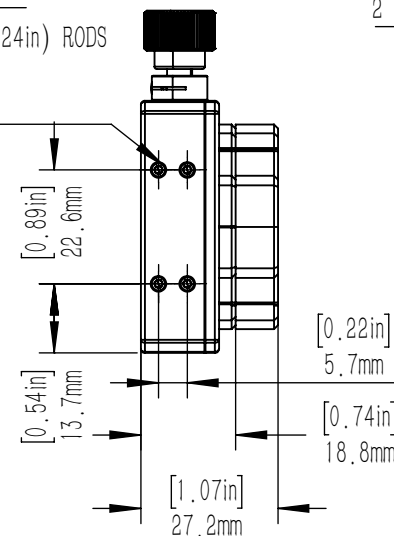

LOCKING FOR ADJUSTER KNOB
1.5 mm(0.06in) HEX
2 PLACE

SM1 SERIES (φ 1.035-40)
INTERNAL THREADS
3.5mm (0.14in) DEEP

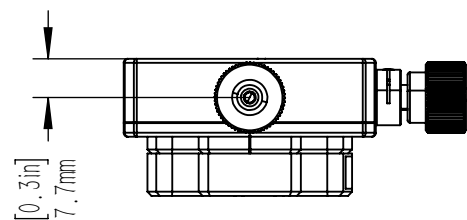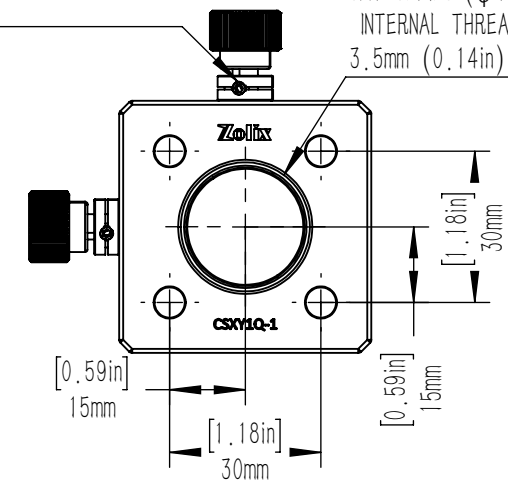

ADJUSTER KNOBS WITH
2.0mm [5/64in] HEX DRIVE
M5 × 0.25 THREAD,
0.25mm/TURN [0.01in/TURN] PITCH
2 PLACES

DRAWING PROJECTION					CSXY1Q—1					
	NAME	DATE	30mm Cage—Compatible XY Translation Stage		MATERIAL	WEIGHT	SCALE	REV		
DRAWN	NIC	4th/August/2025			FOLLOW THE PARTS	0.096	1:1	V1		
APPROVAL	DICK	4th/August/2025			shop.zolix.com.cn					
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION										