


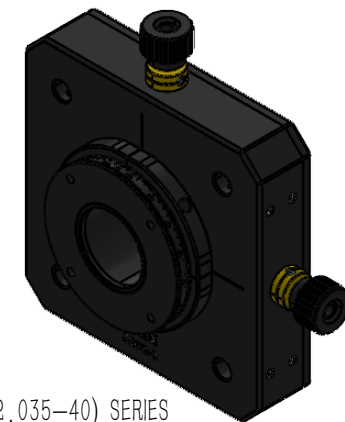


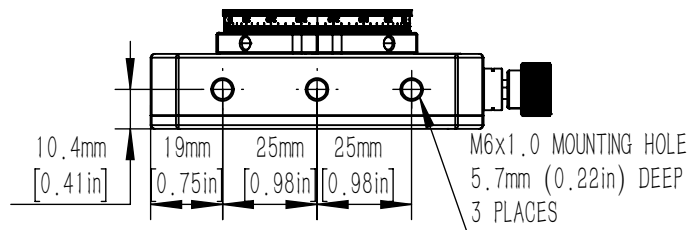


SM1($\phi 1.035''-40$) SERIES INTERNAL THREA
22.5mm (0.86in) DEEP
SM1R RETAINING RING (INCLUDED)
2.0mm (0.08in) THICK
 $\phi 23.0\text{mm}$ [0.91in] CLEAR APERTUR

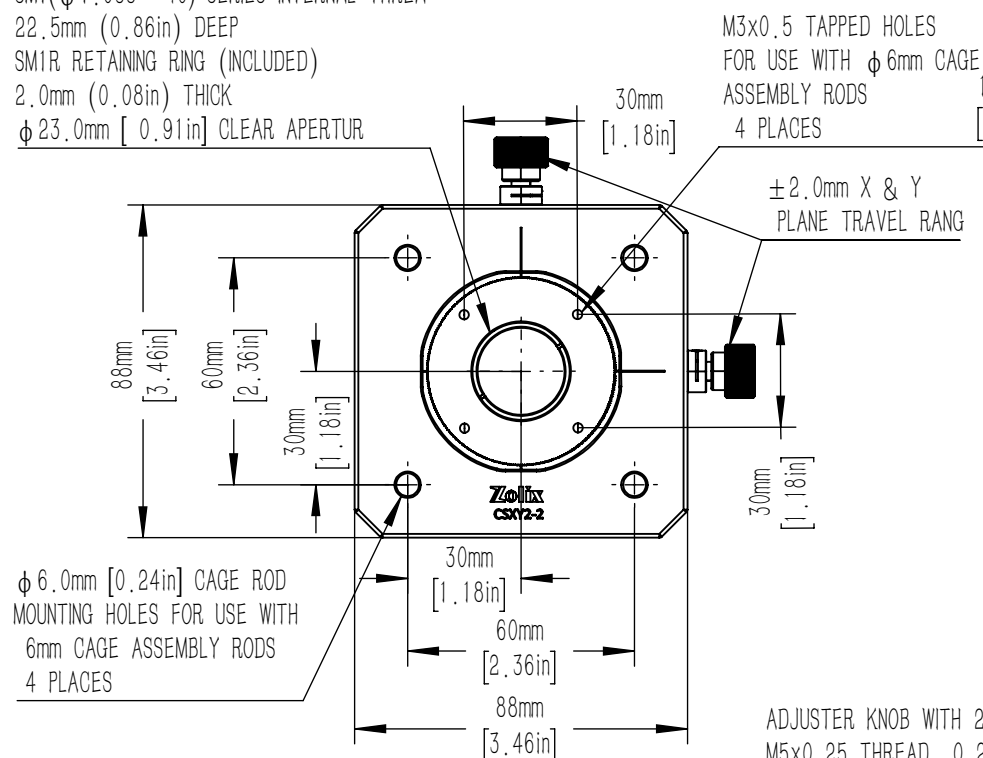


LOCKING FOR $\phi 6\text{mm}$ (0.24in) RODS
1.5mm(0.06in) HEX
8 PLACES

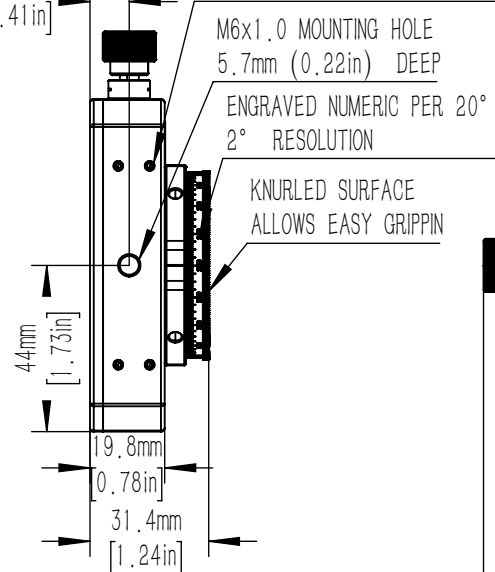

SM2(2.035-40) SERIES
INTERNAL THREAD
3.5mm (0.14in) DEEP

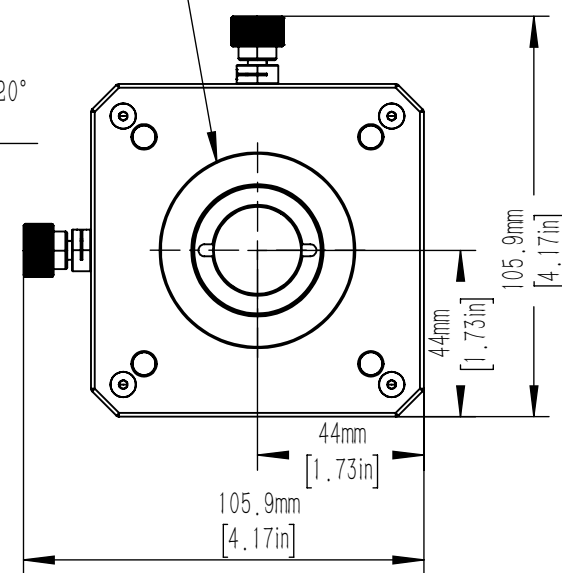

ADJUSTER KNOB WITH 2.0mm (5/64in) HEX
M5x0.25 THREAD, 0.25mm/REV [0.01in/REV]
2 PLACES

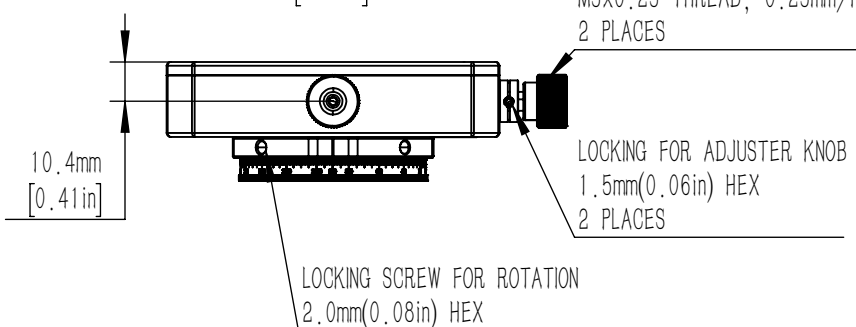

DRAWING PROJECTION					CSXY2-2					
	NAME	DATE	60 mm XY DISPLACEMENT ADJUSTMENT MOUNT		MATERIAL	WEIGHT	SCALE	REV		
DRAWN	NIC	6th/Nov/2025			FOLLOW THE PARTS	0.319	1:2	V1		
APPROVAL	DICK	6th/Nov/2025			shop.zolix.com.cn					
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION										