



M6X0.25 LOCKABLE ADJUSTER SCREWS
 PROVIDES $\pm 2.5\text{mm}$ TOTAL LINEAR DISPLACEMENT
 (0.25mm PER REVOLUTION)
 2 PLACES
 2.0mm [5/64in] HEX

ZOOM ADJUSTMENT DIAL
 PROVIDES $\pm 1.5\text{mm}$ [$\pm 0.06\text{in}$] Z-ADJUSTMENT
 500 μm /REV RESOLUTION



ADJUSTER LOCKING SCREW
 1.5mm HEX
 2 PLACE

M6X1.0 TAPPED HOLE
 7.0mm [0.27in] DEDP
 2 PLACES

CAGE ROD LOCKING SET SCREW
 1.5mm HEX
 8 PLACES TOTAL, 4 PER SIDE

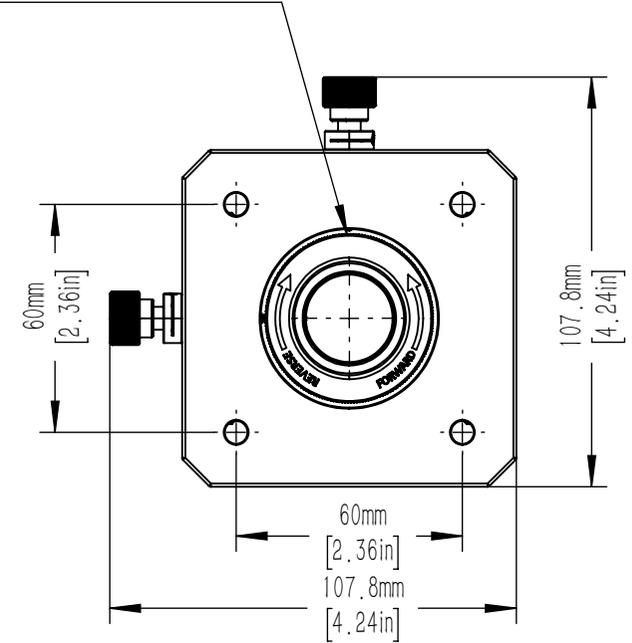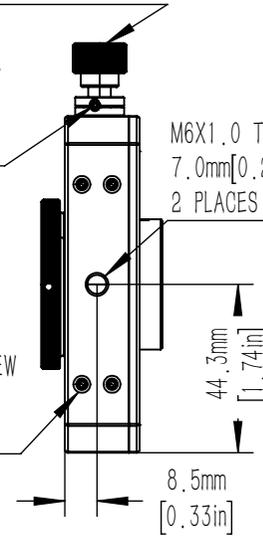

SM1 ($\phi 1.035\text{in}-40$) SERIES INTERNAL THREAD
 R-SM1 RETAINING RING INCLUDED
 ACCEPTS $\phi 25.4\text{mm}$ [$\phi 1.00\text{in}$] OPTICS
 UP TO 10mm [0.39in] THICK
 $\phi 23.0\text{mm}$ [0.90in] CLEAR APERTURE

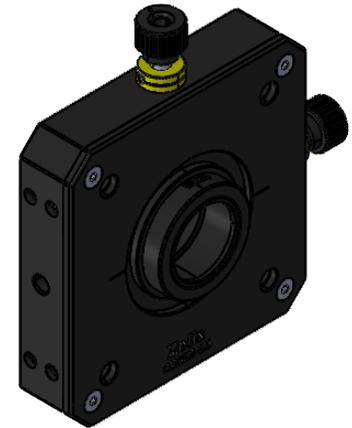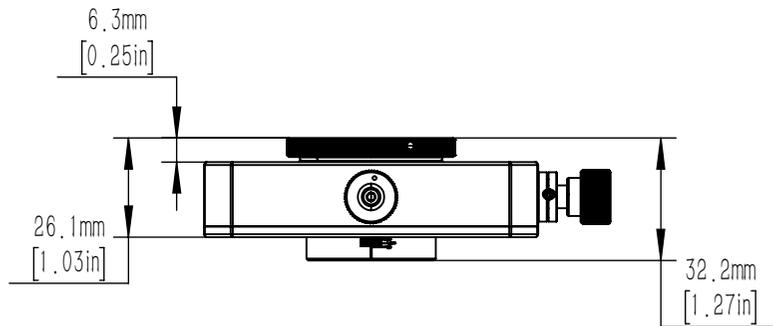

DRAWING PROJECTION				CSXYZ2-2.5					
	NAME	DATE							
DRAWN	NIC	6th/Nov/2025		XYZ DISPLACEMENT ADJUSTMENT MOUNT		MATERIAL	WEIGHT	SCALE	REV
APPROVAL	DICK	6th/Nov/2025				FOLLOW THE PARTS	0.354	1:2	V1
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION						shop.zolix.com.cn			