


M5x0.25 NO KNURLED ADJUSTER SCREWS PROVIDED $\pm 1.2^\circ$ PITCH ANGLE DISPLACEMENT (0.35° PER REVOLUTION)
 YAW ANGLE DISPLACEMENT (0.47° PER REVOLUTION)
 WITH LOCK SCREW 2 PLACES 2mm [0.08in] HEX (INCLUDED)

A-A

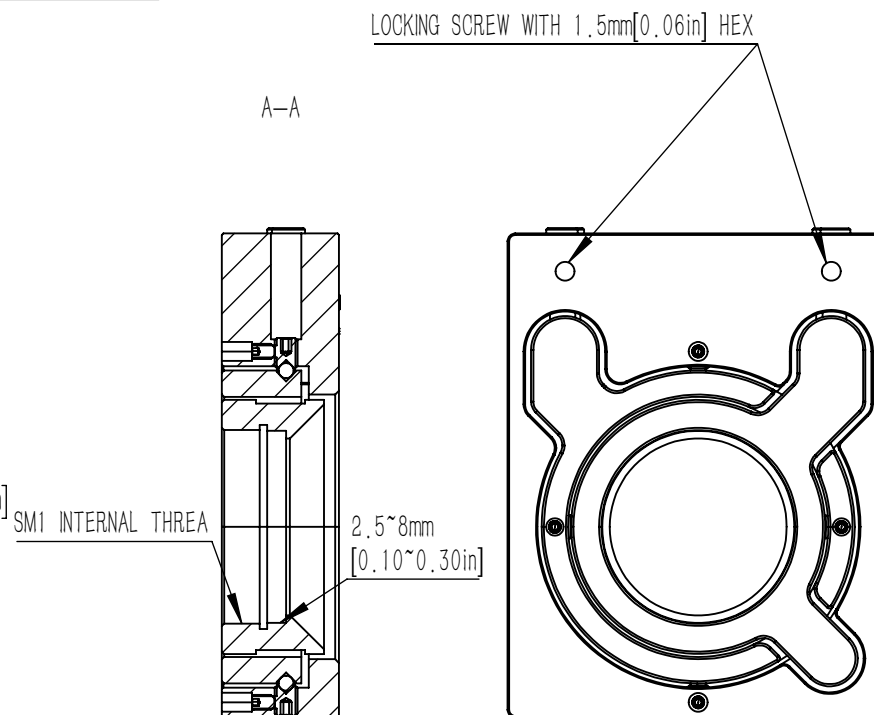

DRAWING PROJECTION			<h1 style="text-align: center;">Zolix</h1>				
NAME							DATE
DRAWN		1st/Feb/2026		UPPER-ADJUSTABLE UNIVERSAL BEAM SPLITTER MOUNT			
APPROVAL		1st/Feb/2026					
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION			MATERIAL		WEIGHT	SCALE	REV
			FOLLOW THE PARTS		0.096	1:1	V1
			shop.zolix.com.cn				