

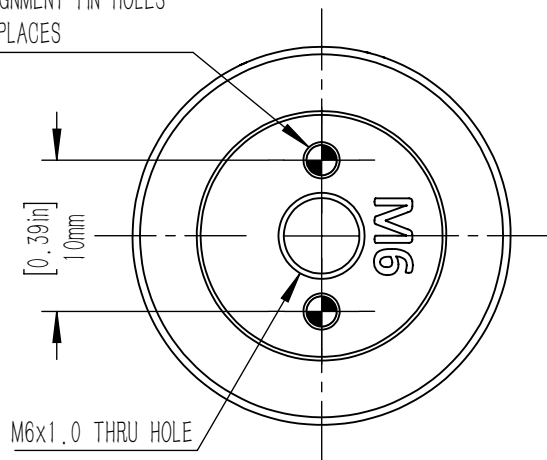
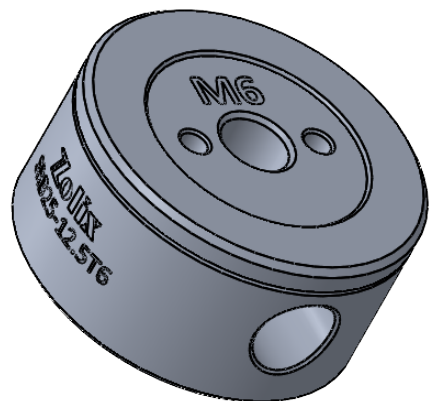


$\phi 2.01\text{mm}$ [0.079in]
 4.2mm [0.175in] DEEP
 ALIGNMENT PIN HOLES
 2 PLACES

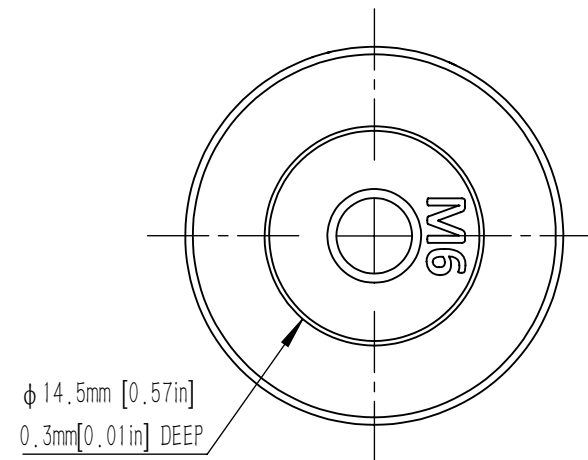

$\phi 6\text{mm}$ [0.24in]
 6.5mm [0.26in] DEEP
 2 PLACES FOR
 5mm BALL DRIVER OR HEX KEY
 PROVIDES EXTRA TORQUE WHEN
 TIGHTENING/REMOVING MOUN

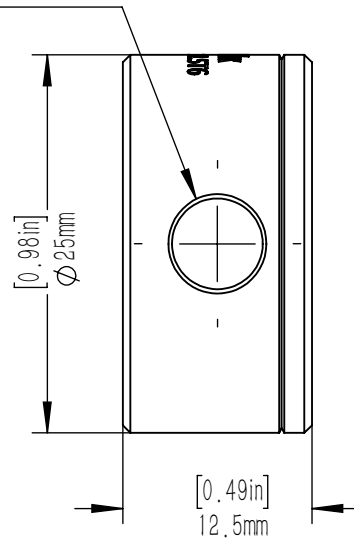

DRAWING PROJECTION			SRB25-12.5T6				Zolix			
	NAME	DATE								
DRAWN	NIC	23rd/June/2025	25mm OPTICAL CONNECTING ROD WITHOUT BASE				MATERIAL	WEIGHT	SCALE	REV
APPROVAL	DICK	23rd/June/2025					FOLLOW THE PARTS	0.014	2:1	V1
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION							shop.zolix.com.cn			