



$\phi 2.01\text{mm}$ [0.079in]
 4.2mm [0.175in] DEEP
 ALIGNMENT PIN HOLES
 2 PLACES

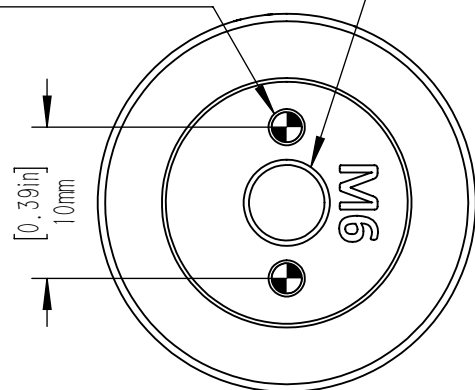


M6x1.0 MOUNTING HOLE
 10mm [0.39in] DEEP

$\phi 6\text{mm}$ [0.24in]
 6.5mm [0.26in] DEEP
 2 PLACES FOR
 5mm BALL DRIVER OR HEX KEY
 PROVIDES EXTRA TORQUE WHEN
 TIGHTENING/REMOVING MOUN

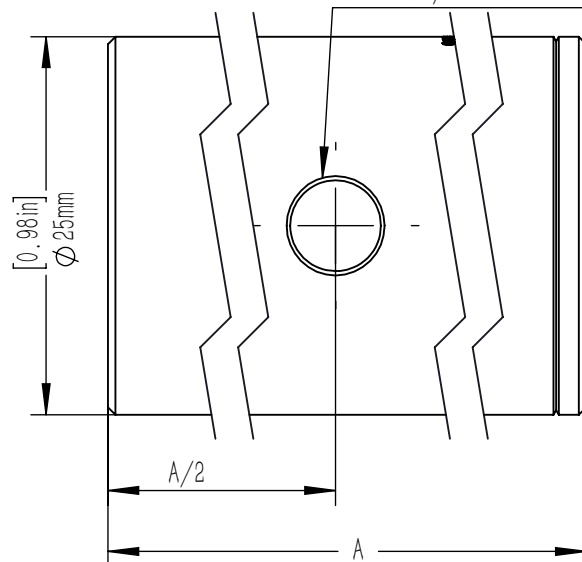


$\phi 14.5\text{mm}$ [0.57in]
 0.3mm [0.01in] DEEP

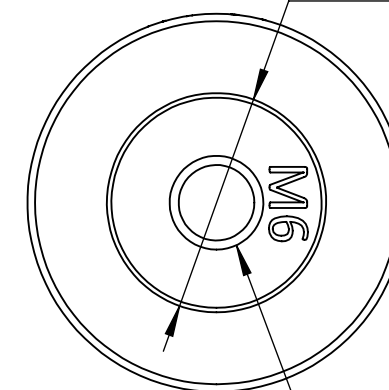

M6x1.0 MOUNTING HOLE
 10mm [0.39in] DEEP

NO	ITEM	A HEIGHT/mm [in]	WEIGHT/kg
1	OP1-20B6	20[0.78]	0.07
2	OP1-25B6	25[0.98]	0.09
3	OP1-30B6	30[1.18]	0.11
4	OP1-38B6	38[1.5]	0.14
5	OP1-40B6	40[1.57]	0.15
6	OP1-45B6	45[1.77]	0.17
7	OP1-50B6	50[1.97]	0.19
8	OP1-55B6	55[2.17]	0.21
9	OP1-60B6	60[2.36]	0.23
10	OP1-70B6	70[2.75]	0.27
11	OP1-75B6	75[2.95]	0.29
12	OP1-80B6	80[3.15]	0.31
13	OP1-85B6	85[3.35]	0.333
14	OP1-100B6	100[3.94]	0.39
15	OP1-200B6	200[7.87]	0.79
16	OP1-300B6	300[11.8]	1.18
17	OP1-400B6	400[15.8]	1.57
18	OP1-500B6	500[19.7]	1.98

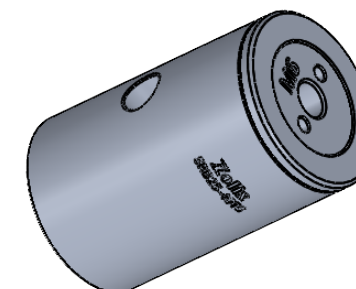

DRAWING PROJECTION			SRB25-xxT6		Zolix			
	NAME	DATE						
DRAWN	NIC	23rd/June/2025	25mm OPTICAL CONNECTING ROD WITHOUT BASE		MATERIAL	WEIGHT	SCALE	REV
APPROVAL	DICK	23rd/June/2025			FOLLOW THE PARTS	0.049	2:1	V1
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION			shop.zolix.com.cn					