



M8 X 0.50 INTERNAL THREAD,
USED FOR FITTING AND
INSTALLING ASPHERIC LENSES


ADJUSTABLE WRENCH HOLE
4 PLACES, 2 PER SIDE

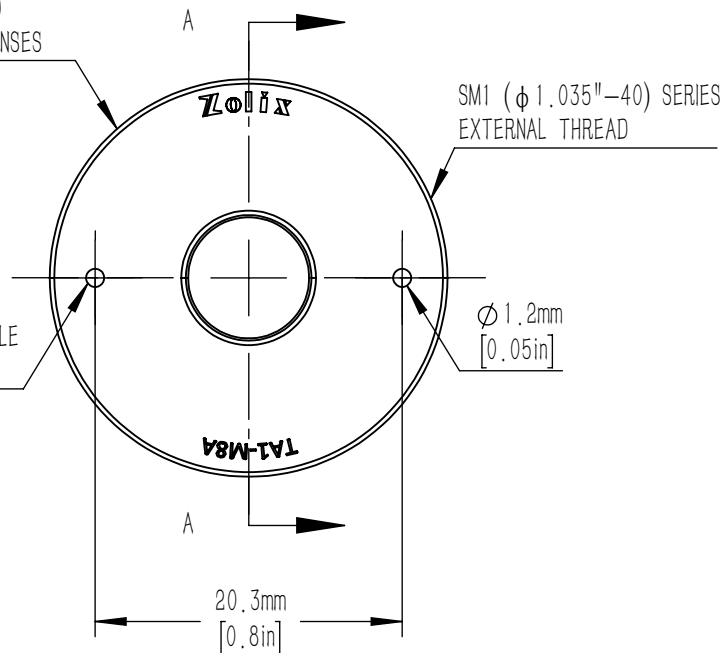

A-A

NITRILE RUBBER O-RINGS PROVIDE
A FRICTION FIT WITH
MATING COMPONENTS

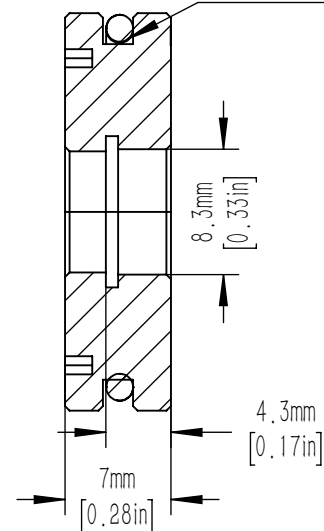

DRAWING PROJECTION						TA1-M8A						
	NAME	DATE	THREADED ADAPTER			MATERIAL	WEIGHT	SCALE	REV			
DRAWN	NIC	21/October/2025				FOLLOW THE PARTS	0.009	2:1	V1			
APPROVAL	DICK	21/October/2025				shop.zolix.com.cn						
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION												