
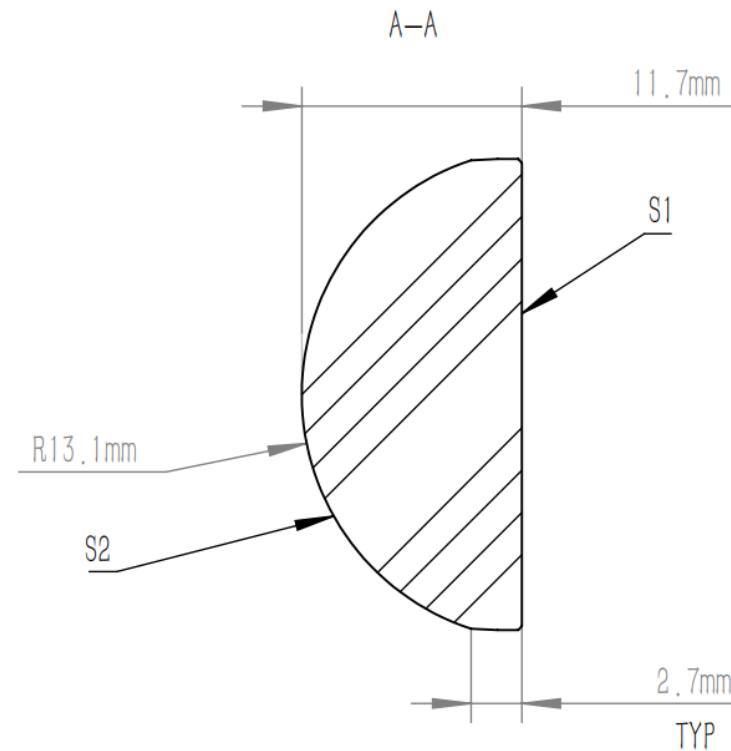


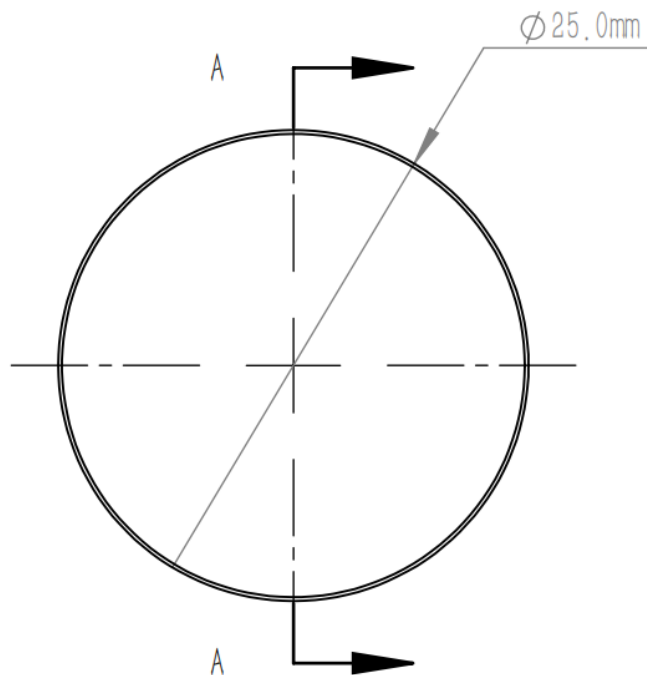

1. DESIGN WAVELENGTH: 587.6 nm
2. OPERATION WAVELENGTH: 700 nm—1100 nm
3. DIAMETER TOLERANCE: +0.0/−0.1 mm
4. CLEAR APERTURE: >90%CA
5. THICKNESS TOLERANCE: ±0.1 mm
6. FOCAL LENGTH: $f=25.4 \text{ mm} \pm 1\%$
7. BACK FOCAL LENGTH(REF): $bf=17.7 \text{ mm}$
8. SURFACE QUALITY(S/D)(S1,S2): 40/20
9. SURFACE FLATNESS(S1): $\lambda/2 @ 632.8 \text{ nm}$
10. SURFACE POWER(S2): $3\lambda/2 @ 632.8 \text{ nm}$
11. SURFACE IRREGULARITY(S2): $\lambda/4 @ 632.8 \text{ nm}$
12. CENTRATION: <3 arcmin
13. CHAMFER: <0.2 mm, 45°
14. COATING(S1,S2): AR COATING $R_{avg} < 0.5\% @ 700 \text{ nm}—1100 \text{ nm}$

DRAWING PROJECTION 			OLB-250-25-B		Zolix			
	NAME	DATE			PLANO CONVEX LENS	MATERIAL	WEIGHT	SCALE
DRAWN	JAC	18th/JUL./2025	FOLLOW THE PARTS			5:1	1.0	
APPROVAL	OLI	18th/JUL./2025	shop.zolix.com.cn					
THE DRAWINGS ARE ONLY FOR TYPE SELECTION INFORMATION								